

## N29 SA4 Stencil Cleaner

In order to meet your daily SMT adhesive or solder paste stencil cleaning requirements, even for frameless stencils, the N29 SA4 is an efficient and innovative solution.



Specially designed to provide high cleaning performance, the stencil is immersed in the upright position and submitted to the superior cleaning performance of perpendicular ultrasound and is perfectly cleaned in just a few minutes.

The in-line filtration removes continuously the soil loading and keeps the cleaning medium at high quality levels.

The use of an aqueous product (no flash-point, low VOC content, pH neutral) that makes it possible to separate the residues, ensures a 100% closed loop cleaning process to meet today's economic and environmental demands.

### Characteristics:

- 💧 Ultrasonic Cleaning system,
- 💧 Water based process in close loop,
- 💧 Rinsing with filtered cleaning liquid,
- 💧 No water, no compressed air,
- 💧 Magnetic driven pumps,
- 💧 Automated lift after cleaning cycle,
- 💧 Hot air drying system included.

**"Plug and Clean"**

**Technical Data:**

GENERAL	
Dimension (Length x Width x Height)	1100 x 700 x 1015 mm
Empty weight	250 kg
Voltage supply	230V single phase 50/60Hz 16A ± 5% plug

ULTRASONICS	
Ultrasonic area	550 x 450 mm
Power	550 W max

CLEANING UNIT	
Volume	55 Liters
Pumps	2 magnetic driven
Filters	2 standards 20in 5µm filters
Time cycle	4 minutes solder paste; 10 minutes glue

DRYING UNIT	
Crossflow fan maximum flow rate	17m <sup>3</sup> /h
Heating element	1500W Stainless steel element with thermostat
Time cycle	From 10 to 15 minutes


TOOLS	
Frameless Stencil adaptor	Standard sizes available, special sizes on request
Misprinted boards tool	Maximum area 500 x 500 mm
Squeegee and tools	Stainless steel basket 500 x 40 x 80 mm

**Efficient**

- Effective cleaning of adhesive or solder paste stencils, misprinted boards and squeegee.
- Patented filtration avoids contamination build up.
- Drying a stencil while the next is getting clean is possible ensuring high through put rates.
- Completely automated with PLC.
- Automated maintenance alarm.
- Traceability in Option.

**Economical**

- Low cleaning process costs.
- Cleaning agent evaporation minimized by cover design.
- Product recycled permanently.
- Low electrical consumption.
- Minimal maintenance requirements (standard filter cartridges).

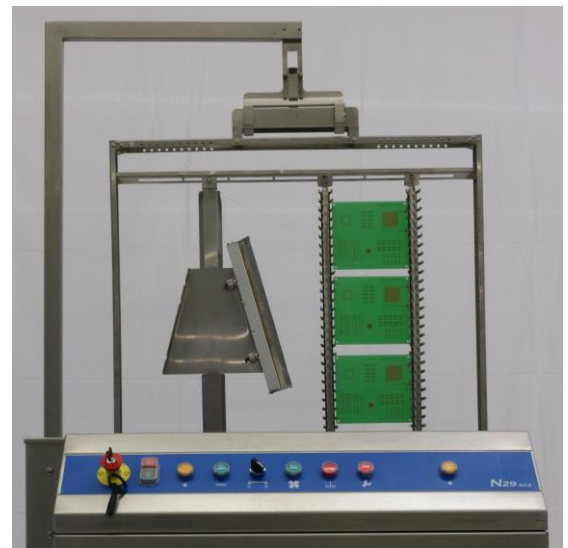

Contact us for a demonstration

MBtech

106, chemin de la Gironde

31470 Saint-Lys – France

Tél : +33 5 61 91 71 85

Fax : +33 5 61 91 33 60

@ : [commercial@mb-tech.fr](mailto:commercial@mb-tech.fr)

**It protects the environment**